

ZIRKOL LINEAR UGR

New lamp of the collection, ZIRKOL LINEAR UGR is equipped with a particular optical unit that allows direct emission with a reduced glare index (UGR <19). Aluminum structure available in two finishes and two LED colour temperatures. Equipped with ceiling rose and DALI control system, particularly suitable for installation in offices and work environments where high visual comfort is required.



1,40M | 3000K

LAMPING

| | |
|-------------------|--|
| Source | Linear LED |
| Total power | 45W |
| Emission | Direct UGR<19 |
| Switching | DALI |
| Tension | 220/240V |
| Color temperature | 3000K |
| Luminous flux | 4300lm |
| Typ CRI | 80 |
| IP class | 20 |
| Dimensions | 140x2,6x5 |
| Materials | Aluminium |
| Notes | remote driver, RAL 9005 black, RAL 9016 white. Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment) |
| Net lamp weight | 3,2 kg |

Codes

BZRL1614I39WBO
BZRL1614I39WNE


Structure

white
black

PACKAGE

Package 01 Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

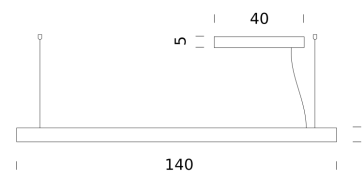

1,40M | 4000K

LAMPING

| | |
|-------------------|--|
| Source | Linear LED |
| Total power | 45W |
| Emission | Direct UGR<19 |
| Switching | DALI |
| Tension | 220/240V |
| Color temperature | 4000K |
| Luminous flux | 4500lm |
| Typ CRI | 80 |
| IP class | 20 |
| Dimensions | 140x2,6x5 |
| Materials | Aluminium |
| Notes | remote driver, RAL 9005 black, RAL 9016 white. Included: 1 driver, 1 driver box (40x5x4,5cm), 1 electrical cable length 3m, 2 adjustable metal cable length 3m (including ceiling attachment) |
| Net lamp weight | 3,2 kg |

Codes

BZRL1614I39NBO
BZRL1614I39NNE

Structure

white
black

PACKAGE

Package 01 Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

