

Bellhop Table

Designed by Edward Barber and Jay Osgerby



Rechargeable direct light table lighting device. Base and dome in coloured PC. Diffuser in Opaline injection moulded photo-engraved PC. 24-hours' autonomy, charging via Micro-USB-C. Push-button switch positioned on the base provides the 4-step dimmer function. Battery status indicator positioned under the base. USB-C charging cable included, useful length 120cm. USB battery charging on plug with interchangeable plugs.

Main specifications

Mounting	Table	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	1
LED type	LED Module	Source Power (W)	2.5
System Flux (lm)	151		

Optical

Lighting Type	Direct
Lighting distribution	Roto symmetric
CCT (K)	2700K
Cold Beam Lighting	No
Extreme Cut off	No

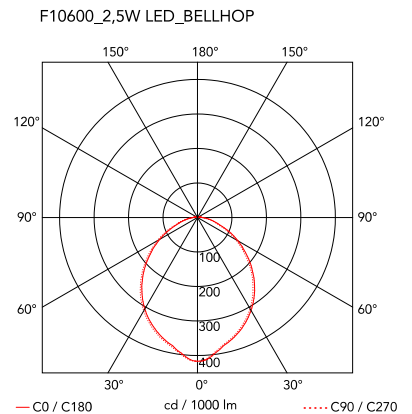

Electrical

Insulation class	III	Dimmable type	Electronic 12V
Frequency (Hz)	50/60	Batteries Inside	Yes
Main Voltage (Vac)	100-240/5	Dimming Interface	Dimmer
Driver	Remote included	Power supply replaceable	Replaceable control gear by an end-user
Dimmable	Yes	Plug Type	Type G, Type A, Type C
Battery Type	LI-PO		
Charging Max Power	14		
Charging Min Time	3h - 0% to 100%		
Charging Socket/Connector	USB-C		

Physical

Length (mm)	210	IP external	20
Net weight (kg)	1.3		
Gross weight (kg)	2.87		
IP	20		